

Work Order ID 110869

January-08-14 12:36:33 PM

110869

Page 1

Item ID: D4917-343 Accept *N900040100* Setup Start *NS1*

Revision ID:

Item Name: Placard, Max Load 12 Stop *NS2*

Start Date: 1/03/14 Start Qty: 10.00 *10*

Required Date: 1/08/14 Req'd Qty: 10.00 *10*

Reference:

Cust Item ID:

Customer:

Approvals: Process Plan: MLJ Date: 14-01-09 Tooling: _____ Date: _____

QC: _____ Date: _____ SPC (Y/N): _____ Date: _____

Run Start *NR1*

Stop *NR2*

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
--------------------------------	--------------------------	----------------------	---------	--------	--------------	---------------	---------------	------------------	----------------

Draw Nbr	Revision Nbr
D4917	A

100 0.00

100

Purchasing

Purchasing

Memo

Issue P/O: 22606

E-mail or Ship electronic file and or dwg to vendor

Manufacture as per Dwg and supplied files

Possible supplier: Studio Letrage

Material release note is required.

CL 14/01/14 12

110 0.00

110

Packaging

Packaging

Receive & Inspect for Damage & Mat'l Certs

Memo

P 14/01/20 12

Work Order ID 110869

110869

Page 2

January-08-14 12:36:33 PM

Item ID: D4917-343 Accept *N9000040100* Setup Start *NS1*
 Revision ID: Stop *NS2*
 Item Name: Placard, Max Load
 Start Date: 1/03/14 Start Qty: 10.00 *10* Cust Item ID:
 Required Date: 1/08/14 Req'd Qty: 10.00 *10* Customer:
 Reference:

Approvals: Process Plan: _____ Date: _____ Tooling: _____ Date: _____ Run Start *NR1*
 QC: _____ Date: _____ SPC (Y/N): _____ Date: _____ Stop *NR2*

Sequence ID/ Work Center ID	Operation Description	Set Up/ Run Hours	Tool ID	Tool #	Plan Code	Accept Qty	Reject Qty	Reject Number	Insp. Stamp
120	QC6- Inspect dimensions to drawing	0.00				12			
120									
QC	Memo	0.00							
Quality Control									

130	Identify as per dwg & Stock Location: <u>SA 126</u>	0.00				121			
130									
Packaging	Memo	0.00							
Packaging									

DAS
28
9-89

140	QC21- Final Inspection - Work Order Release	0.00							
140									
QC	Memo	0.00							
Quality Control									

14-01-22
 (H) 14-01-20

Picklist Print

January-08-14 12:36:33 PM

Page 1

Work Order ID: 110869

Parent Item: D4917-343

Start Date: 1/03/14

Required Date: 1/08/14

Parent Item Name: Placard, Max Load

Start Qty: 10.00


Required Qty: 10.00

Comments: IPP REV:A 13.12.31 NEW ISSUE DD VERF:RQ

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
D4917-343P Placard, Max Load		Purchased	No				Each	0.0000		10			

B 110869

1/14/14/20 (12)

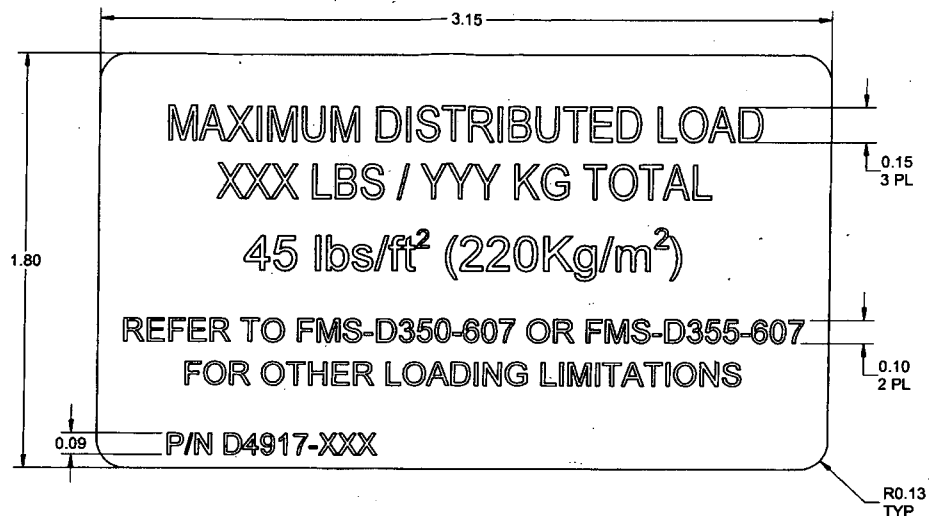

D4917-XXX PLACARD, MAX LOAD

PART NUMBER	LOAD
D4917-300	300 lbs / (136 kgs)
D4917-310	310 lbs / (141 kgs)
D4917-315	315 lbs / (143 kgs)
D4917-320	320 lbs / (145 kgs)
D4917-332	332 lbs / (151 kgs)
D4917-343	343 lbs / (156 kgs)

NOTES:

- 1) MATERIAL: MAKE FROM 3M 7 MIL MASKING FILM #8522CP ON AVERY IPM #2031 ARIAL FONT, RED LETTERING (0.31 HIGH) ON WHITE ADHESIVE BACK.
- 2) FINISH: N/A
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY WITH DART "P/N D4917-XXX" USING ARIAL FONT, RED LETTERING (0.09" HIGH).
WHERE XXX = MAX DISTRIBUTED WEIGHT IN LBS PER TABLE
- 7) WEIGHT: LESS THAN 0.01 lbs

A	NEW ISSUE	AJS	13.06.06
REV.	DESCRIPTION	BY	DATE
DESIGN	AJS	DART AEROSPACE LTD	
DRAWN	AJS	HAWKESBURY, ONTARIO, CANADA	
CHECKED	ML	DRAWING NO.	REV. A
MFG. APPR.	ML	D4917	SHEET 1 OF 1
APPROVED	ML	TITLE	SCALE
DE APPR.	ML	PLACARD, MAX LOAD	NTS
DATE	13.06.06	COPYRIGHT © 2013 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

110869 MLJ
14-01-09

2013-06-25
A.P. ECU 13-672

DQA: _____ Date: _____



WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: _____ Part No. _____ NCR No. _____	DISPOSITION Rework <input type="checkbox"/> Scrap <input type="checkbox"/> Use-as-is <input type="checkbox"/> Suspected Unapproved <input type="checkbox"/>	AGAINST DEPARTMENT/PROCESS <table style="width:100%;"> <tr> <td>Skid-tube <input type="checkbox"/></td> <td>Crosstube <input type="checkbox"/></td> <td>Water Jet <input type="checkbox"/></td> <td>Engineering <input type="checkbox"/></td> </tr> <tr> <td>Machining <input type="checkbox"/></td> <td>Small Fab <input type="checkbox"/></td> <td>Prod. Eng. Coord. <input type="checkbox"/></td> <td>Quality <input type="checkbox"/></td> </tr> <tr> <td>Thermoforming <input type="checkbox"/></td> <td>Finishing <input type="checkbox"/></td> <td>Rec/Store/Packaging <input type="checkbox"/></td> <td>Other <input type="checkbox"/></td> </tr> <tr> <td>Large Fab <input type="checkbox"/></td> <td>Composite <input type="checkbox"/></td> <td>Supplier <input type="checkbox"/></td> <td></td> </tr> </table>	Skid-tube <input type="checkbox"/>	Crosstube <input type="checkbox"/>	Water Jet <input type="checkbox"/>	Engineering <input type="checkbox"/>	Machining <input type="checkbox"/>	Small Fab <input type="checkbox"/>	Prod. Eng. Coord. <input type="checkbox"/>	Quality <input type="checkbox"/>	Thermoforming <input type="checkbox"/>	Finishing <input type="checkbox"/>	Rec/Store/Packaging <input type="checkbox"/>	Other <input type="checkbox"/>	Large Fab <input type="checkbox"/>	Composite <input type="checkbox"/>	Supplier <input type="checkbox"/>	
Skid-tube <input type="checkbox"/>	Crosstube <input type="checkbox"/>	Water Jet <input type="checkbox"/>	Engineering <input type="checkbox"/>															
Machining <input type="checkbox"/>	Small Fab <input type="checkbox"/>	Prod. Eng. Coord. <input type="checkbox"/>	Quality <input type="checkbox"/>															
Thermoforming <input type="checkbox"/>	Finishing <input type="checkbox"/>	Rec/Store/Packaging <input type="checkbox"/>	Other <input type="checkbox"/>															
Large Fab <input type="checkbox"/>	Composite <input type="checkbox"/>	Supplier <input type="checkbox"/>																

Root Cause	Date	Step	Qty	Description of work order update or non-conformance	Initial Chief Eng	Action Description	Sign & Date	Verification	QC Inspector
Design									
Doc/Data									
Equip/Tooling									
Handling/Pre									
Material									
Operator									
Offset/Setup									
Process									
Supplier									
Training									
Transport									
Unapproved									

FAULT CATEGORY

Landing Gear <input type="checkbox"/> Bending <input type="checkbox"/> Centre Not Concentric <input type="checkbox"/> Cracks <input type="checkbox"/> Crimp/Kink/Ripple/Wave <input type="checkbox"/> Cuffs <input type="checkbox"/> Crushing <input type="checkbox"/> Heat Treat <input type="checkbox"/> Inspection Strip in Tube <input type="checkbox"/> Marks/Chatter <input type="checkbox"/> Turning Sequence <input type="checkbox"/> Wave/Twist in Tube	General <input type="checkbox"/> Bend <input type="checkbox"/> BOM/Route <input type="checkbox"/> Broken/Damage/Defect <input type="checkbox"/> Burrs <input type="checkbox"/> Contamination <input type="checkbox"/> Countersink <input type="checkbox"/> Cut Too Short <input type="checkbox"/> Drawing <input type="checkbox"/> Drill Holes <input type="checkbox"/> Finish <input type="checkbox"/> Fit/Function	<input type="checkbox"/> Folio/Program <input type="checkbox"/> Grain <input type="checkbox"/> Hardware <input type="checkbox"/> Inspection Incomplete/Unqualified <input type="checkbox"/> Instructions Incomplete/Unclear <input type="checkbox"/> Misaligned/off center <input type="checkbox"/> Mislabeled <input type="checkbox"/> Misread <input type="checkbox"/> Off-set <input type="checkbox"/> Out of Calibration <input type="checkbox"/> Out of Sequence	<input type="checkbox"/> Outside Dimensions <input type="checkbox"/> Over/Under tolerance <input type="checkbox"/> Part Incorrect <input type="checkbox"/> Part Lost/Missing <input type="checkbox"/> Part Moved <input type="checkbox"/> Positioned Wrong <input type="checkbox"/> Power Loss/Surge <input type="checkbox"/> Pressure/Forced <input type="checkbox"/> Set-up <input type="checkbox"/> Temperature/Cure <input type="checkbox"/> Weld <input type="checkbox"/> Wrong Stock Pulled <input type="checkbox"/> Other
--	--	---	--



Dart Aerospace Ltd.
1270 Aberdeen Street
Hawkesbury, ON K6A 1K7
Tel: 613 632 9577
Fax: 613 632 1053

PURCHASE ORDER

Purchase Order ID **PO22606**

Purchase Order Date 1/14/2014

PO Print Date 1/14/2014

Page Number 4 of 4

Order From :

VC-STU001

Ship To : DART AEROSPACE LTD

STUDIO DE LETTRAGE 2001
210 MAIN WEST
HAWKESBURY, ON K6A 2H6
CA

1270 ABERDEEN
HAWKESBURY, ON K6A 1K7
CANADA

Contact Name

Vendor Phone 613 632 5449

Ship To Contact

Ship To Phone

Ship Via: Yours ppd

Ship Acct:

Buyer

Chantal Lavoie

Customer POID

Customer Tax #

10127-2607

Terms

Net 30

Currency

CAD

FOB

Destination-Collect

Line Total: \$80.00

10 D4917-310P

Placard, Max Load

1/22/2014

Yes

12.00

Each

\$6.67

\$80.00

1/22/2014

AS PER DWG D4917 REV. A
B110952

Line Total: \$80.00

11 D4917-343P

Placard, Max Load

1/22/2014

Yes

12.00

Each

\$6.67


\$80.00

1/22/2014

AS PER DWG D4917 REV. A
B110869

Line Total: \$80.00

PO Total: \$879.99

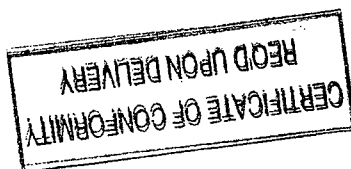

CL mg

Note: Pricing listed above is as per contract agreement between Dart Aerospace and the respective manufacturer.

No substitution or deviation without consent.

Certificate of Conformity or Material Certification required ☒ YES ☐ NO

PST# 6122-5207

Change Nbr:

1

Change Date: 1/14/2014

Studio de Lettrage

210 Main Street W
Hawkesbury, Ontario K6A 2H6

INVOICE

Invoice No.: 21506
Date: 01/17/2014
Ship Date:
Page: 1
Re: Order No. WO11655

Sold to:

Dart Aerospace Ltd
1270 Aberdeen
Hawkesbury, Ontario K6A 1K7

Ship to:

Dart Aerospace Ltd
Hawkesbury, Ontario

Business No.: 82500 7651 RT0001

Item No.	Unit	Quantity	Description	Tax	Unit Price	Amount
		12	D2137P	H	6.6667	80.00
		20	D2268P	H	4.0000	80.00
		20	D2269P	H	4.0000	80.00
		12	D3108-5P	H	6.6667	80.00
		12	D3428-1P	H	6.6667	80.00
		12	D3997-37P	H	6.6667	80.00
		12	D3499-5P	H	6.6667	80.00
		12	D4307-250P	H	6.6667	80.00
		12	D4896-3P	H	6.6667	80.00
		12	D4917-310P	H	6.6667	80.00
		12	D4917-343P	H	6.6667	80.00
			PO# 22606			
			H - HST 13%			
			HST			114.40
Studio de Lettrage HST: #825007651RT0001						
Shipped By: Tracking Number:						
Comment:						
Sold By:						
Total Amount						994.40

****Certificate of Conformity****

Customer:

Studio Lettrage

Purchase Order #:

22606

Packing Slip #:

wa# 11655

Part #:

Serial #:

Description:

see Back

Quantity:

Certification:

We hereby certify that:

1. The above the listed items were manufactured, repaired and/or inspected in accordance with applicable drawings and/or specifications;
2. All work was accomplished in accordance with the Dart Aerospace Purchase Order;
3. Results of all inspections, chemical or physical tests, as well as other evidence, which shows the acceptability of raw materials, parts and/or assembly components are on file and available for inspection at any time.

Authority:

Avery

APPROVAL:

SANDY CALIN

DATE:

Signature:

Sandy Calin

17 Jan 2014.

Title:

Project coordinator

PRODUCT DATA SHEET



Avery® IPM™ 2031

issued: 01/04/2005

Introduction

Avery® IPM™ 2031 is a high quality pressure-sensitive vinyl film, designed for use on wide format inkjet printers. Avery® IPM™ 2031 has excellent printing properties, allowing crisp print quality with bright and vibrant colours. Avery® IPM™ 2031 offers rapid ink drying and a water-resistant material. It combines good adhesion during its life and easy removal afterwards.

Description

Facefilm: 80-micron premium white calendered, topcoated vinyl.
Adhesive: removable, acrylic based
Backing paper: one side coated kraft paper, 140 g/m²

Features

- Excellent printability
- Vibrant and bright colours
- Crisp print quality
- Spray water resistant wit specific pigmented inks
- Good adhesion, excellent removability
- Warranty on outdoor durability

Recommendations for use

A wide variety of full-colour graphics for indoor - and **short/medium term outdoor** applications such as posters, murals, displays, exhibition stands, vehicle graphics etc. Avery® IPM™ 2031 is suitable for application to a wide variety of substrates and will remove cleanly for up to 1 year after application.

IPM media should be handled with care as any surface contamination may affect the print quality. Media should be processed in an environment of 15-25°C and 30-70% relative humidity. After drying, the finished prints should be wrapped in polyethylene film and despatched flat or rolled with the printed side facing outwards. To protect prints against water, UV/light and abrasion, overlamination with a clear film is recommended. For specific details of Avery® DOL combinations, refer to "Technical Bulletin 5.3. Recommended combinations of Avery® Overlaminates and Avery® Digital Print Media".

Always test your combination of Avery® IPM™ medium, inkjet printer and inks prior to commercial use.

Compatibility

Avery® IPM™ 2031 is compatible with a broad selection of inkjet printers, when printing with pigmented, water based inks. For specific details refer to "Technical Bulletin 5.6 Avery Dennison Inkjet Print Media - Printer compatibility".

Durability:

Avery® IPM™ 2031 is warranted for outdoor use in conjunction with pigmented outdoor inks from HP, Encad and Colorspan. The warranted period varies from type of application and type of overlaminate from 18 months up to 5 years. For full details, see our Avery® IPM™ Outdoor warranty.



www.averygraphics.com

Graphics Division
Rijndijk 86, P.O. Box 118
2394 ZG Hazerswoude - The Netherlands
Tel +31 71 3421500 - Fax +31 71 3421538

PRODUCT CHARACTERISTICS

Avery® IPM™ 2031

Physical properties

Features	Test method ¹	Results
Caliper, facefilm	ISO 534	80 µm
Gloss	ISO 2813, 20°	1%
Dimensional stability	DIN 30646	0.3 mm. max
Adhesion, initial	FINAT FTM-1, stainless steel	180 N/m
Adhesion, ultimate	FINAT FTM-1, stainless steel	260 N/m
Flammability		Self extinguishing
Accelerating ageing	DIN 53587, 500h exposure	No negative impact on film
Shelf life	Stored at 22° C/50-55 % RH	Performance
Removability		2 years
Not when applied to: Nitro-cellulose paints, ABS, Polystyrene, certain types of PVC		up to 1 year
Durability ²	Overlaminated with DOL 4300	5 years
	Overlaminated with DOL 1000, DOL 1100	
	with overlaps	3 years
	Overlaminated without overlaps	
	for static applications only	2 years
	Without overlaminate and used for static,	
	Non-abrasive application ONLY	18 months

Only when printed with ENCAD GO, HP and Colorspan pigmented inks and when properly applied in accordance with our application instructions. Only applicable for vertical exposure.

Temperature range

Features	Results
Application temperature	Minimum: +10°C
Service temperature	-20°C to +80°C

Important

Information on physical and chemical characteristics is based upon tests we believe to be reliable. The values listed herein are typical values and are not for use in specifications. They are intended only as a source of information and are given without guarantee and do not constitute a warranty. Purchasers should independently determine, prior to use, the suitability of this material to their specific use.

All technical data are subject to change. In case of any ambiguities or differences between the English and foreign versions of these Conditions, the English version shall be controlling.

Warranty

Avery® branded materials are manufactured under careful quality control and are warranted to be free from defect in material and workmanship. Any material shown to our satisfaction to be defective at the time of sale will be replaced without charge. Our aggregate liability to the purchaser shall in no circumstances exceed the cost of the defective materials supplied. No salesman, representative or agent is authorised to give any guarantee, warranty, or make any representation contrary to the foregoing.

All Avery® branded materials are sold subject to the above conditions, being part of our standard conditions of sale, a copy of which is available on request.

1) Test methods

More information about our test methods can be found on our website.

2) Durability

The durability is based on middle European exposure conditions. Actual performance life will depend on substrate preparation, exposure conditions and maintenance of the marking. For instance, in the case of signs facing south; in areas of long high temperature exposure such as southern European countries; in industrially polluted areas or high altitudes, exterior performance will be decreased.



www.averygraphics.com

Graphics Division

Rijndijk 86, P.O. Box 118
2394 ZG Hazerswoude – The Netherlands
Tel +31 71 3421500 – Fax +31 71 3421538